




DTR



SPECIFICATIONS

CONTACT RATING: AC/DC 42 V, 100mA
 MECHANICAL LIFE: 1,000,000 cycles
 CONTACT RESISTANCE: 100mΩ max.(initial)
 INSULATION RESISTANCE: 1,000MΩ min. 100VDC
 DIELECTRIC STRENGTH: 250VAC/1 min.
 OPERATING TEMPERATURE: -40°C to +80°C

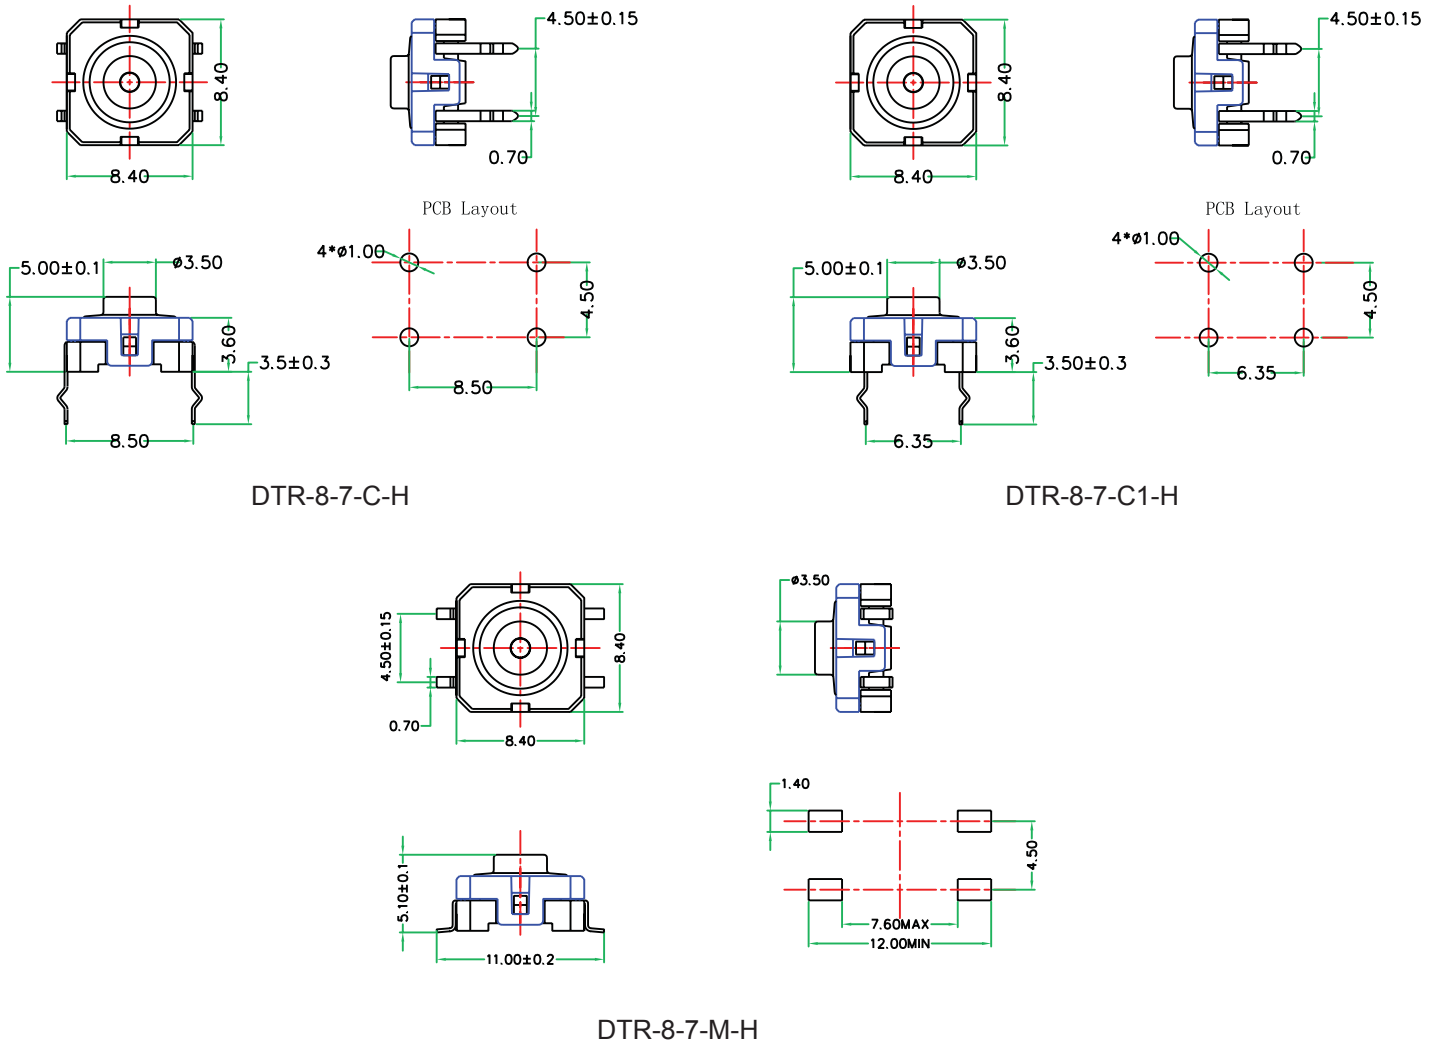

HOW TO ORDER

DTR - - - - - - - - -

DUSTPROOF TACT SWITCH SIZE OPERATION FORCE HEIGHT TERMINAL CAP PACKAGE RoHS code:

8 = 8.4 x 8.4 7 : 250gf = 5.00mm C : P.C TYPE
 C1 : P.C TYPE
 M : SMT TYPE

= standard: Tube
 T/R = Tape & Reel

Plunger option:
 = without plunger
 T1 = Total height 9.75
 T2 = Total height 12.55

H : RoHS Compliant