

# Automatic Unloader




## Standard features:

- Supports most standard sized magazines
- Data for multiple magazines can be stored/recalled for faster changeovers
- Unload conveyor included
- Modular magazine conveyors
- High precision level positioning
- PLC controlled
- SMEMA interface

The Unloader unloads the production line and loads bare or pre-mounted PCB Boards into rasterized magazines.

Filling ratio, skip factor, first and last load / unload position of the magazine is selectable. Most standard sized magazines are supported and multiple magazine settings can be stored in memory for easy retrieval when changing between different sized magazines.

All input is made through the operation panel, which makes the unit easily managed. When necessary, the three coloured light tower, with audible alarm, attracts the operators attention and an informative message is displayed on the operation panel.

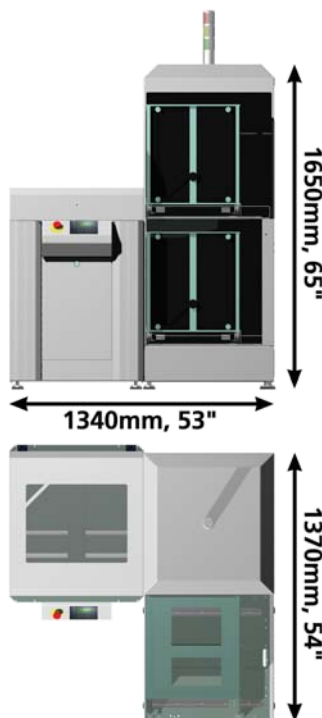

## Technical information:

- |                                      |                         |
|--------------------------------------|-------------------------|
| • Board transport level:             | 940 ± 30 mm (37 ± 1.2") |
| • Mag. lower edge to first PCB slot: | Min. 30 mm (1.2")       |
| • Mag. lower edge to last PCB slot:  | Max. 547 mm (21.5")     |
| • Max. magazine depth:               | 535 mm (21")            |
| • Max. magazine width:               | 580 mm (22.8")          |
| • Max. magazine height:              | 570 mm (22.4")          |
| • Max. lift weight:                  | 50 kg (110 lbs)         |
| • Voltage:                           | 100 - 240 VAC, 50/60 Hz |
| • Air pressure:                      | 6-8 bar (600-800 kPa)   |
| • SMEMA Interface                    |                         |

## Options:

- SMEMA Board Available detection
- Automatic width adjustment on included Unload conveyor
- Additional magazine conveyor unit

Order code: Automatic Unloader, K-017-0562