


Chip™ Fuses

CC12H Series, High I²t Fuse

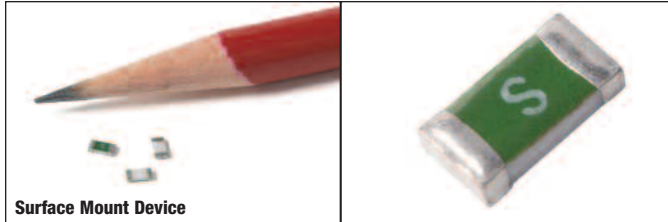

Description

- High I²t 1206 footprint surface mount fuse
- High inrush withstand capability
- Excellent temperature and cycling characteristics
- RoHS compliant and lead free construction
- Compatible with solder reflow and wave solder



Electrical Characteristics		
Amp Rating	% of Amp Rating	Opening Time
1-5A	100%	4 Hours Minimum
1-3A	200%	1-60 Seconds
1-5A	250%	5 Seconds Maximum
1-5A	300%	0.1-3 Seconds
1-5A	1000%	0.2-20mS

Agency Information


- c us Recognition File number: E19180 (1- 5A)

Environmental Data


- Thermal Shock: MIL-STD-202, Method 107, Test Condition B
- Vibration: MIL-STD-202, Method 204, Test Condition C
- Moisture Resistance: MIL-STD-202, Method 106, 50 day cycle
- Solderability: ANSI/J-STD-002, Test B
- Normal ambient temperature: 23°C
- Operating temperature range -40°C to 125°C

Dimensions - mm (in)

Drawing Not to Scale

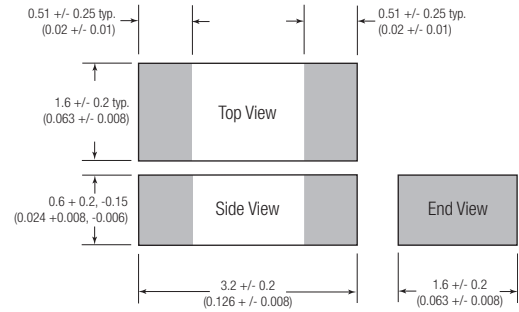

Pad Layout - mm (in)



Soldering Method

- Wave Solder Immersion: 260°C, 10 seconds maximum.
- Solder Reflow: 260°C, 30 seconds maximum.

Packaging and Ordering

- 3000 fuses on 8mm tape and reel on a 7 inch (178mm) reel per EIA Standard 481. Specify Catalog Symbol and package code suffix "-TR" (e.g.: CC12H1A-TR)

Specifications

Catalog Symbol	Current Rating (Amps)	Amp Rating Mark	Voltage Rating (Vdc)	Interrupting Rating* (Amps)	Resistance (Ω)** Typical	Typical Melt (I ² t)† DC	Typical Voltage Drop (mV)‡
CC12H1A	1	H	63	50	0.35	0.18	490
CC12H1.5A	1.5	K	63	50	0.178	0.4	355
CC12H2A	2	N	63	50	0.10	1.1	305
CC12H2.5A	2.5	O	63	50	0.07	1.7	240
CC12H3A	3	P	63	50	0.045	2.2	185
CC12H3.5A	3.5	R	63	50	0.034	2.7	180
CC12H4A	4	S	63	50	0.03	3.2	169
CC12H4.5A	4.5	X	32	100	0.025	4.2	160
CC12H5A	5	T	32	100	0.021	6.0	140

* DC Interrupting Rating (Measured at rated voltage, time constant of less than 50 microseconds, battery source)


** DC Cold Resistance (Measured at 10% of rated current)

† Typical Melting I²t (Measured with a battery bank at rated DC voltage, 10x-rated current, not to exceed IR, time constant of calibrated circuit less than 50 microseconds)

‡ Typical Voltage Drop (Measured at rated current after temperature stabilizes)

Device designed to carry rated current for four hours minimum. An operating current of 80% or less of rated current is recommended, with further derating required at elevated ambient temperatures.

Time-Current Curves

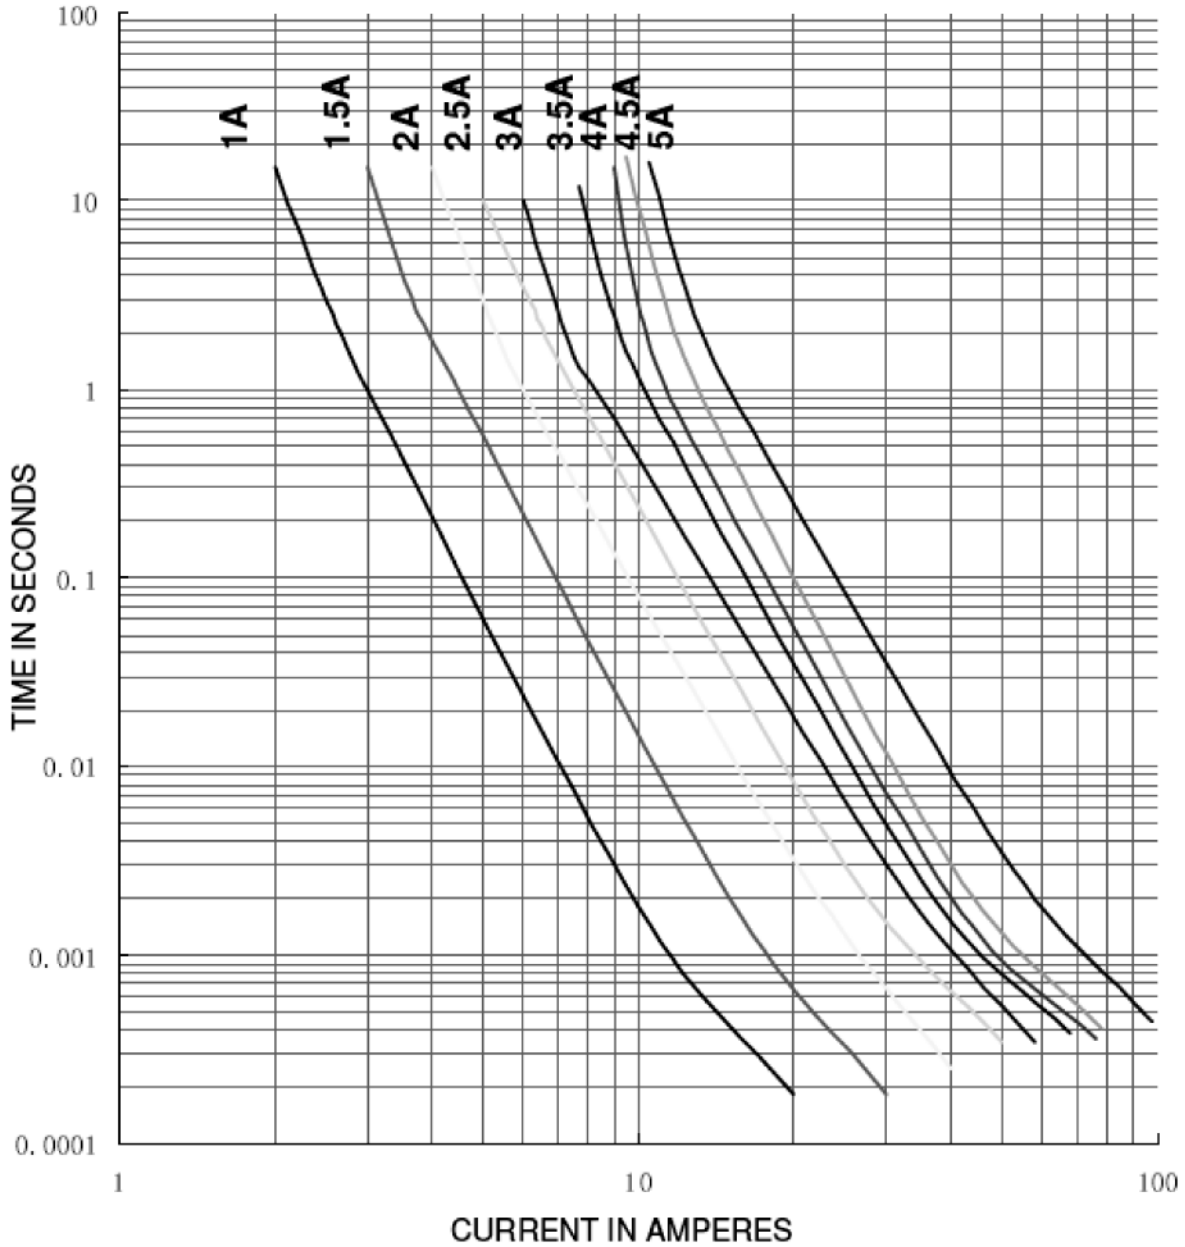

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.